

PRODUCT DESCRIPTION

Version 30.04.2010




Article name	Resort	
Manufacturing process	DIN ISO 2424	tufted
Measures	DIN 3018	rolls, approx. 400 cm width *
Surface	DIN ISO 2424	cut pile, heat-set
Coloration	DIN ISO 2424	chromojet patterned
Pile material	Dir. 71/307/CEE mod.	100% Polyamide
Primary backing	DIN ISO 2424	synthetic
Secondary backing	DIN ISO 2424	textile backing
Total weight	ISO 8543	approx. 1.800 g/m ²
Total height	ISO 1765	approx. 7,0 mm
Pile weight	DIN ISO 2424	approx. 900 g/m ²
Pile height	ISO 1766	approx. 5,0 mm
Number of tufts	ISO 1763	approx. 169.850 /m ²

Functional properties

Wear classification	EN 1307 (old Version)	heavy (3)
Wear classification	EN 1307 (new Version)	commercial-normal (32)

Physical properties

Sound insulation L _w	ISO 140-8	approx. 24 dB
Resistance to heat reduction	ISO 8302	0,12 m ² K/W
Burning classification	DIN EN 13501-1	Cfl-s1
Light fastness	ISO 105-B02	≥ 5
Water fastness	DIN EN ISO 105 E01	≥ 4
Resistance to abrasion	DIN EN ISO 105 X12	≥ 3-4

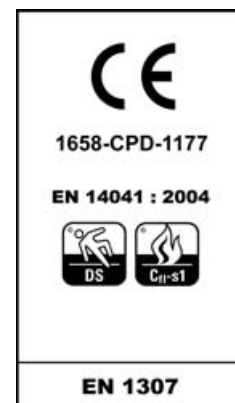

* pattern repeat in width and length according to collection

We reserve the right to make technical changes while maintaining the service properties of the carpet.